




SHC series

High Precision Counting Scale

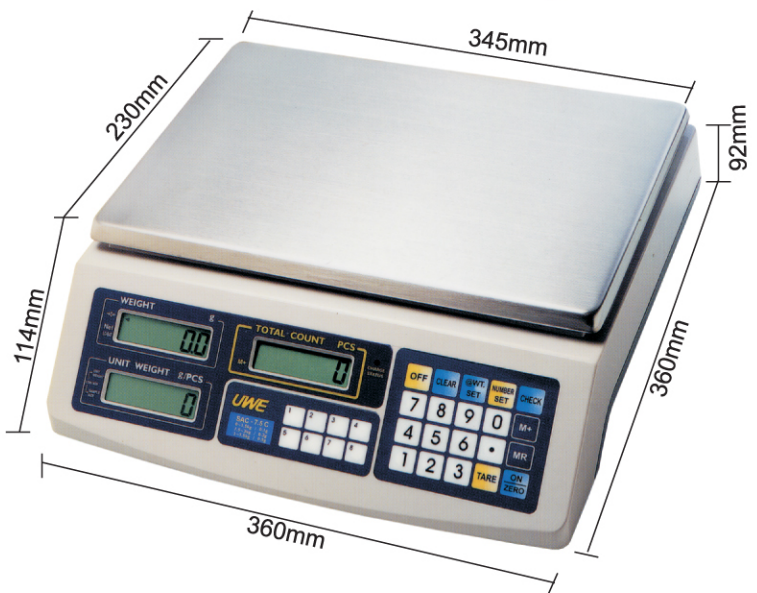

FEATURES

- 24 Bit Σ - Δ High Speed A/D Converter with 1,000,000 Internal Count
- 1/60000 ~ 1/75000 Overall Triple Intervals Display Resolution for SAC and 1/30000 Single Interval for SHC
- Design to Meet Industrial High Precision Counting Applications
- Equipped with Power-on Zero Tracking, Digital Motion Filter at Zero & Weighing, Smart Power Saving, Full Tare Range, Auto Piece Weight Enhancement, Auto Calibration and Accumulation Function for Weight and Quantity
- Completed with Full Numeric Keypad, Over Weight & Quantity Alarm, 8 x One-Touch Piece Weight Memory (PLU), Insufficient Unit Piece Weight & Sample Size Warning and Charging Status Indicator
- Bold Type Wide Angle LCD Display Digits
- Low Battery Warning Signal
- Long Battery Operating Time: 100 Hours Plus
- Dual Power Sources: By Built-in Rechargeable Battery or Power Adaptor
- Adjustable Feet, Backlight, Bubble Level and Power Adaptor Included

OPTION AVAILABLE

- RS 232C or Printer Interface

SPECIFICATIONS

Model No.	Capacity / Readability	Accuracy
SHC- 3C	3000g / 0.05g	1/60000 Single Interval
SHC- 6C	6000g / 0.1g	
SHC-12C	12kg / 0.2g	
SHC-30C	30kg / 0.5g	
Tare Range	Full Tare Range (Subtractive)	
Platter Size	230 x 345mm & 180 x 292mm (SHC-1.5C & SHC-3C only)	
Power Source	By Built-in Rechargeable Battery or AC/DC Power Adaptor	
Operating Environment	0° ~ 40°C (32° ~ 104°F) Non-dondensed R.H. < 85%	

• Specifications subject to change without notice

