




ATM series Platform Scale

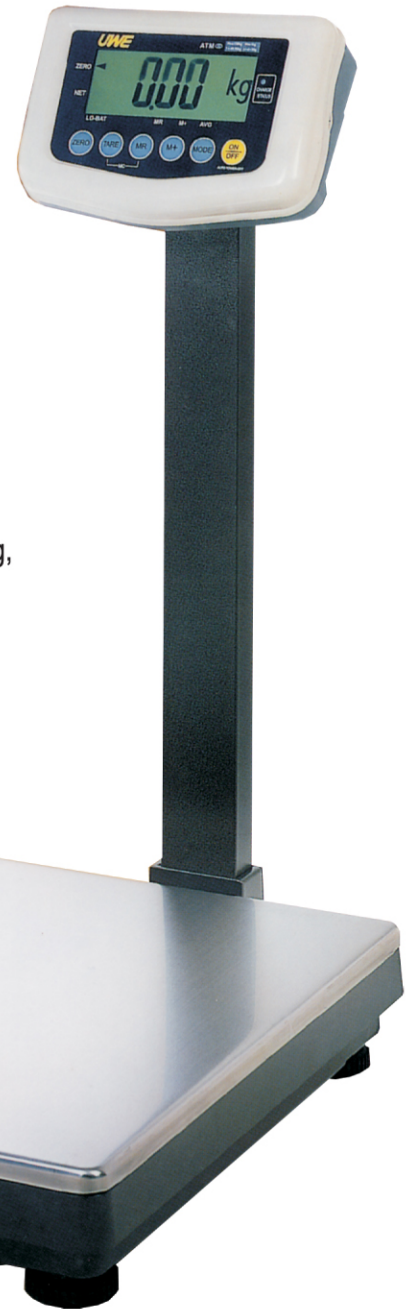

Features:

- OIML-R76 and EC class III type approved
- Flexible platform collocation
- Mold injected aluminum alloy platform
- Stainless steel platform cover
- Overload protection devices against excessive load or shock applied
- Designed to meet industrial application requirements
- User programmable capacity and division
- Equipped with power on Zero Tracking, Re-Zero, Auto Calibration, Auto Power Saving, Digital Motion Filtering Device, Auto tare, Accumulation Memory and Dual Interval Selection
- Dual power source: by built-in rechargeable battery or power adaptor
- Complete with low battery and charging status indicator
- 5 ½ x 51mm Oversize Wide Angle LCD Digits
- Adjustable feet, rechargeable battery, bubble level and power adaptor included

** Depends on R60 approval grade of the load cell used

Display Resolution:- OIML Applications

- Standard = 3000
- Maximum = 30000 under extended display mode

Display Resolution:- Non-OIML Applications

- User Programmable
- Recommended = 6000 to 7500
- Maximum = 30000

Options Available

- EL Backlight
- Printer Interface
- RS232C interface

Specifications

Model No.	Capacity	Recommended Display Resolution		Platform
		OIML Application	Non-OIML Application	
ATM-F60	60kg	0.02kg	0.01kg	450 x 520mm with Stainless Steel Cover
ATM-F150	150kg	0.05kg	0.02kg	
ATM-F300	300kg	0.1kg	0.05kg	
ATM-L150	150kg	0.05kg	0.02kg	500 x 600mm with Stainless Steel Cover
ATM-L300	300kg	0.1kg	0.05kg	
Tare Range	OIML = 1/3 Max - e Non-OIML = Full Range			
Power Source	By Built-in rechargeable Battery or AC/DC Power Adaptor			
Operating Environment	0° ~ 40°C (32° ~ 104°F), Non-condensed R.H. < 85%			

